

ABN 46 091 597 661



reducing geotechnical uncertainty

Contact: Mark Chapman
 Phone: 0437-824-776
 Fax: 07-3358-4366
 Email: mark@insitu.com.au

Michael O'Rourke
 0407-467-025
 mick@insitu.com.au

Mailing Address
 187 Elliott Road
 BANYO Qld 4014

RIG DATA SHEET

MAD MACK (IGS3)

25 June 2019




Explanation

To the extent reasonably possible IGS has developed the design of Mad Mack to satisfy the NSW mining regulation/guidelines MDG-15 (see adjacent)

The rig has recently been third-party assessed under these guidelines and with minimal alteration passed inspection.

The rig is typically supported on site by our all-terrain amphibious Argo which has also been developed and assessed under MDG-15 for work on recent and current mine sites. The Argo is used for personnel transport, as a safety platform, and to probe access (ie traffickability) conditions for the rig as and where necessary.

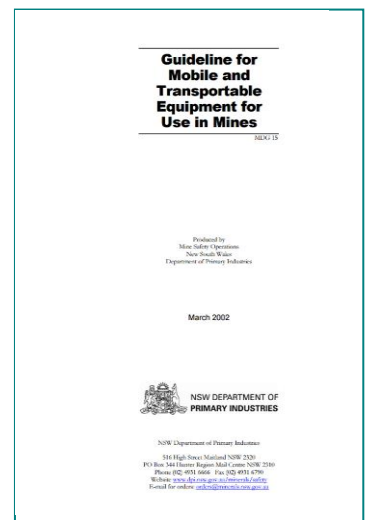

Very-soft-terrain rig

Super-low-pressure flotation tyres

Year Built: 2016

7000kg recovery winch

Moveable jack feet for bog recovery (see below)

Mass 4.3t fully loaded

W=1.8m L=4.4m H=2.6m

Push capability 150kN (using suction feet tie-down)


Climbing Capacity 1:2.5

Test Types:


- CPTu & Tee-Bar
- DMT & SDMT
- Vane Shear

Also:

- Piezometers
- Standpipes
- All IGS Sampler

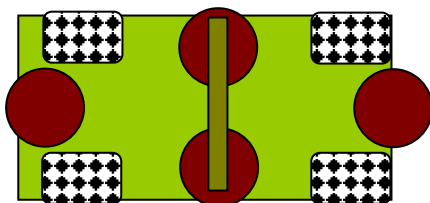

plan view of rig during normal operation

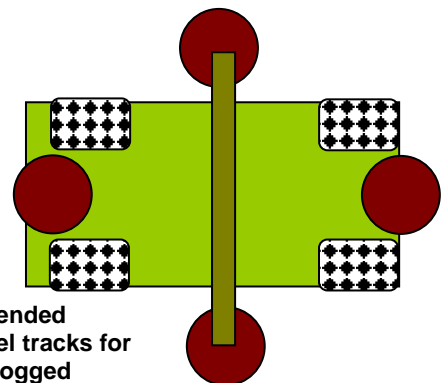

lift-jacks extended outside wheel tracks for recovery if bogged